


CCME 4.1 - Jak připojit 2N® Helios IP

- Pro konfiguraci CCME, prosím stáhněte Cisco Configuration Professional 2.3 z následující webové stránky:

[Download](#)

- 2N® Helios IP bude přidán jako číslo stanice 3336, IP adresa 192.168.22.26

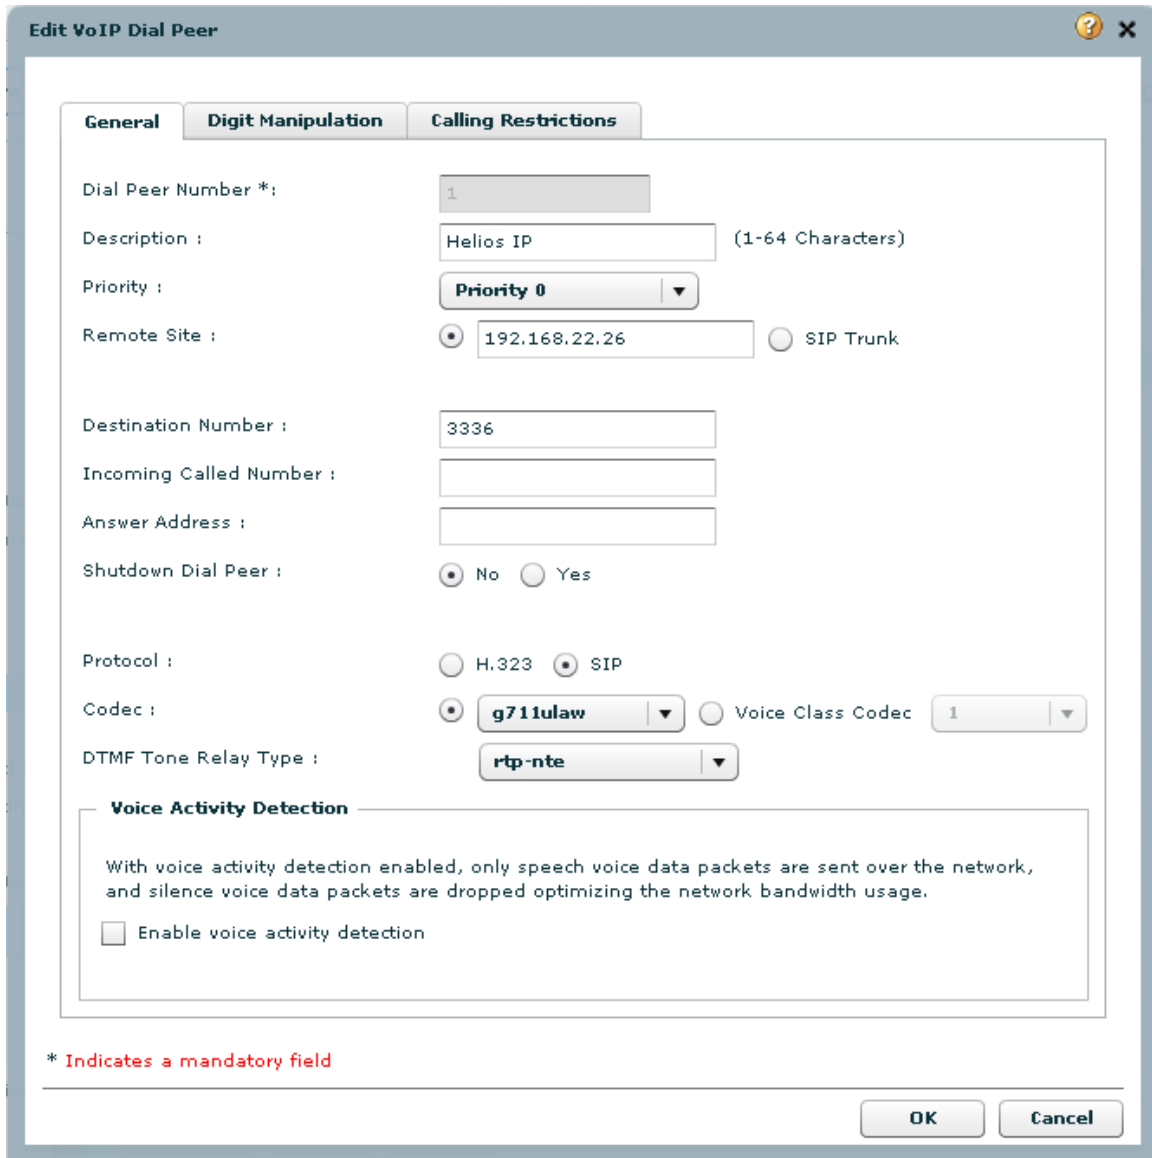

Edit VoIP Dial Peer

General | Digit Manipulation | Calling Restrictions

Dial Peer Number *: 1

Description : Helios IP (1-64 Characters)

Priority : Priority 0

Remote Site : 192.168.22.26 SIP Trunk

Destination Number : 3336

Incoming Called Number :

Answer Address :

Shutdown Dial Peer : No Yes

Protocol : H.323 SIP

Codec : g711ulaw Voice Class Codec 1

DTMF Tone Relay Type : rtp-nte


Voice Activity Detection

With voice activity detection enabled, only speech voice data packets are sent over the network, and silence voice data packets are dropped optimizing the network bandwidth usage.

Enable voice activity detection

* Indicates a mandatory field

OK Cancel

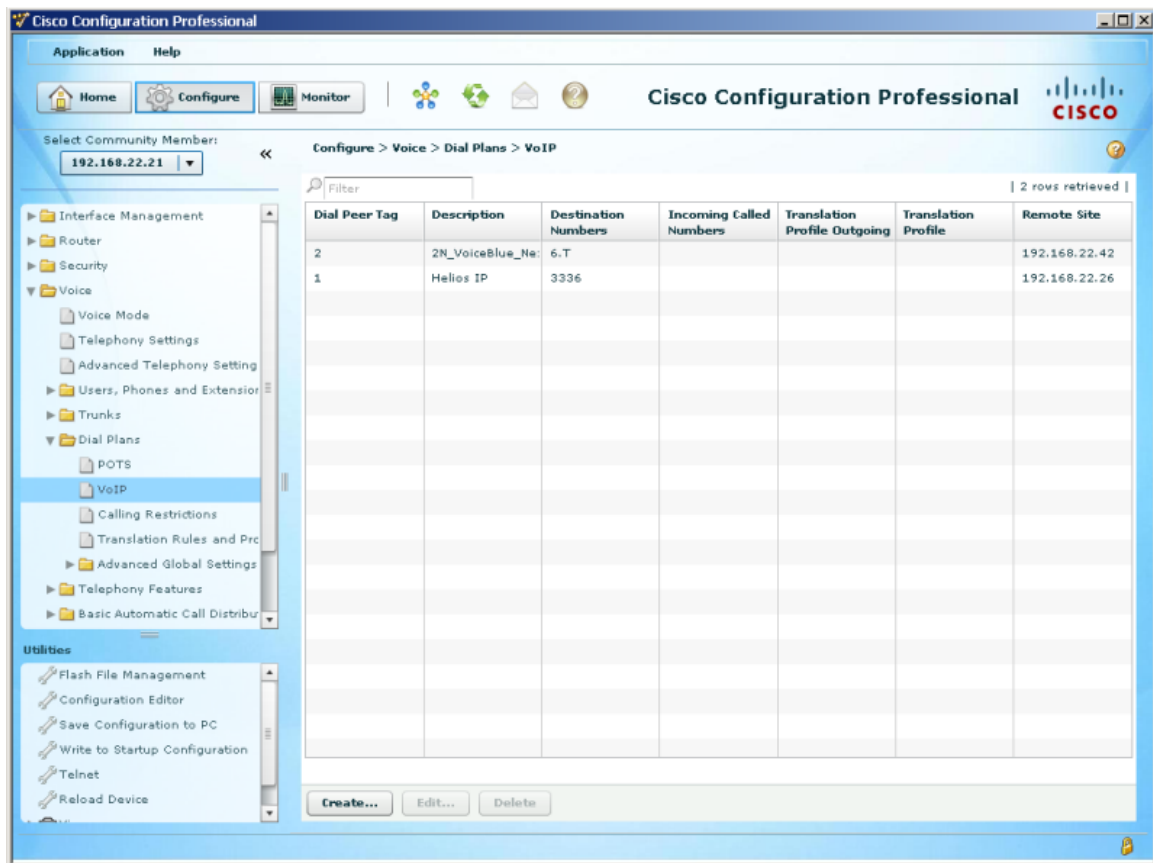

The screenshot shows the Cisco Configuration Professional interface. The breadcrumb navigation is **Configure > Voice > Dial Plans > VoIP**. The left sidebar shows a tree view with **VoIP** selected under **Dial Plans**. The main area displays a table of dial peers with the following data:

Dial Peer Tag	Description	Destination Numbers	Incoming Called Numbers	Translation Profile Outgoing	Translation Profile	Remote Site
2	2N_VoiceBlue_Na	6.T				192.168.22.42
1	Helios IP	3336				192.168.22.26

At the bottom of the table, there are buttons for **Create...**, **Edit...**, and **Delete**.

Další informace:
 Dveřní & Bezpečnostní interkomy (oficiální stránky 2N)