


CCM(6 a 7) - Jak připojit 2N® Helios IP jako stanici

- 2N® Helios IP bude přidán s těmito parametry:
 - uživatel 3738
 - stanice 3738
 - MAC adresa 0050C281F1EB
 - IP adresa 192.168.22.35
- Použité příkazy
 - kontrola licence - view_license
 - ukázání routování - view_route_plan_report
 - vytvoření uživatele - add_user
 - vytvoření stanice - add_station
 - vytvoření linky pro stanici - add_station_line

Přidání uživatele

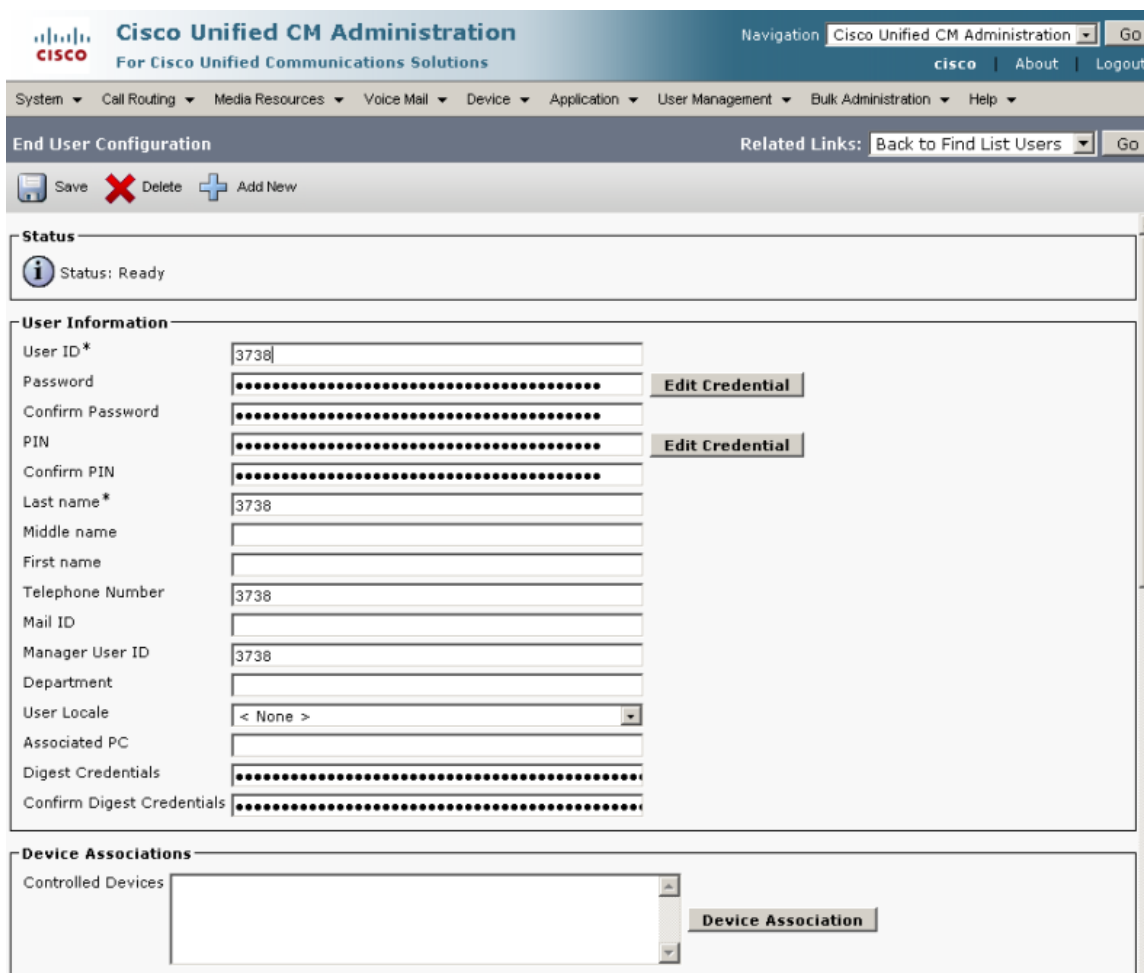

The screenshot displays the Cisco Unified CM Administration web interface. The page title is "End User Configuration" and it includes a navigation menu with options like "System", "Call Routing", "Media Resources", "Voice Mail", "Device", "Application", "User Management", "Bulk Administration", and "Help". The main content area is titled "Add New" and contains a "Status" section showing "Status: Ready". Below this is the "User Information" section, which includes fields for "User ID*" (3738), "Password", "Confirm Password", "PIN", "Confirm PIN", "Last name*" (3738), "Middle name", "First name", "Telephone Number" (3738), "Mail ID", "Manager User ID" (3738), "Department", "User Locale" (set to "< None >"), "Associated PC", "Digest Credentials", and "Confirm Digest Credentials". There are "Edit Credential" buttons next to the Password and PIN fields. At the bottom, the "Device Associations" section includes a "Controlled Devices" dropdown menu and a "Device Association" button.

Extension Mobility

Available Profiles

Controlled Profiles

Default Profile

Presence Group*

SUBSCRIBE Calling Search Space

Allow Control of Device from CTI

Directory Number Associations

Primary Extension

Mobility Information

Enable Mobility

Primary User Device

Enable Mobile Voice Access

Maximum Wait Time for Desk Pickup*

Remote Destination Limit*

Remote Destination Profiles

[View Details](#)

CAPF Information

Associated CAPF Profiles


[View Details](#)

Permissions Information

Groups

Roles

[View Details](#)

 *- indicates required item.

Přidání stanice

Cisco Unified CM Administration For Cisco Unified Communications Solutions

Navigation: Cisco Unified CM Administration Go

System Call Routing Media Resources Voice Mail Device Application User Management Bulk Administration Help

Add a New Phone Related Links: Back To Find/List Go

Next

Status
 Status: Ready

Select the type of phone you would like to create

Phone Type* Third-party SIP Device (Advanced)

Next

*- indicates required item.
 **-. Create a phone template using the Bulk Administration Tool to enable template-based phone creation.

Cisco Unified CM Administration For Cisco Unified Communications Solutions

Navigation: Cisco Unified CM Administration Go

System Call Routing Media Resources Voice Mail Device Application User Management Bulk Administration Help

Phone Configuration Related Links: Back To Find/List Go

Save

Status
 Status: Ready

Phone Type
 Product Type: Third-party SIP Device (Advanced)
 Device Protocol: SIP

Device Information

⚠ Device is not trusted

MAC Address*	0050C281F1EB
Description	Helios IP
Device Pool*	Testing View Details
Common Device Configuration	< None > View Details
Phone Button Template*	Third-party SIP Device (Advanced)
Common Phone Profile*	Standard Common Phone Profile
Calling Search Space	TestTeam
AAR Calling Search Space	TestTeam
Media Resource Group List	MRGL_TestTeam
Location*	Hub_None
AAR Group	< None >
Device Mobility Mode*	Default View Current Device Mobility Settings
Owner User ID	3738
Use Trusted Relay Point*	Default
Always Use Prime Line*	Default
Always Use Prime Line for Voice Message*	Default
Calling Party Transformation CSS	TestTeam
Geolocation	< None >

Use Device Pool Calling Party Transformation CSS
 Retry Video Call as Audio
 Ignore Presentation Indicators (internal calls only)
 Logged Into Hunt Group
 Remote Device

Protocol Specific Information

Presence Group*
 MTP Preferred Originating Codec*
 Device Security Profile*
 Rerouting Calling Search Space
 SUBSCRIBE Calling Search Space
 SIP Profile*
 Digest User

Media Termination Point Required
 Unattended Port
 Require DTMF Reception

MLPP Information

MLPP Domain

ⓘ *- indicates required item.
 ⓘ ** - Device reset is not required for changes to Packet Capture Mode and Packet Capture Duration.
 ⓘ ***Note: Security Profile Contains Addition CAPF Settings.
 ⓘ ****Note: A new Softkey template without supplementary service Softkeys must be used for a protected phone.

Přidání linky stanice

Cisco Unified CM Administration Navigation Cisco Unified CM Administration Go

System Call Routing Media Resources Voice Mail Device Application User Management Bulk Administration Help

Phone Configuration Related Links: Back To Find/List Go

Save Delete Copy Reset Apply Config Add New

Status
Status: Ready

Association Information

Line	Line Name	Action
1	Line [1]	Add a new DN
2	Line [2]	Add a new DN
3	Line [3]	Add a new DN
4	Line [4]	Add a new DN
5	Line [5]	Add a new DN
6	Line [6]	Add a new DN
7	Line [7]	Add a new DN
8	Line [8]	Add a new DN

Phone Type
Product Type: Third-party SIP Device (Advanced)
Device Protocol: SIP

Device Information

Registration: Registered with Cisco Unified Communications Manager 192.168.22.35
 IPv4 Address: 192.168.22.26
 Active Load ID: Unknown
 Device is Active
 ⚠ Device is not trusted
 MAC Address*: 0050C29BF3BA
 Description: Test Helios IP
 Device Pool*: Testing [View Details](#)
 Common Device Configuration: < None > [View Details](#)
 Phone Button Template*: Third-party SIP Device (Advanced)
 Common Phone Profile*: Standard Common Phone Profile
 Calling Search Space: TestTeam
 AAR Calling Search Space: TestTeam

Cisco Unified CM Administration For Cisco Unified Communications Solutions

Navigation Cisco Unified CM Administration Go

cisco About Logout

System Call Routing Media Resources Voice Mail Device Application User Management Bulk Administration Help

Directory Number Configuration Related Links: [Configure Device \(SEP0050C29BF3BA\)](#) Go

Save Delete Reset Apply Config Add New

Status
 Status: Ready

Directory Number Information

Directory Number* 3738
 Route Partition TestTeam
 Description 3738
 Alerting Name 3738
 ASCII Alerting Name 3738
 Associated Devices SEP0050C29BF3BA
 Edit Device
 Edit Line Appearance

Dissociate Devices

Directory Number Settings

Voice Mail Profile < None > (Choose <None> to use system default)
 Calling Search Space < None >
 Presence Group* Standard Presence group
 User Hold MOH Audio Source < None >
 Network Hold MOH Audio Source < None >

AAR Settings

	Voice Mail	AAR Destination Mask	AAR Group
AAR	<input type="checkbox"/> or		< None >
<input checked="" type="checkbox"/> Retain this destination in the call forwarding history			

Call Forward and Call Pickup Settings

	Voice Mail	Destination	Calling Search Space
Calling Search Space Activation Policy			Use System Default
Forward All	<input type="checkbox"/> or	<input type="text"/>	< None >
Secondary Calling Search Space for Forward All			< None >
Forward Busy Internal	<input type="checkbox"/> or	<input type="text"/>	< None >
Forward Busy External	<input type="checkbox"/> or	<input type="text"/>	< None >
Forward No Answer Internal	<input type="checkbox"/> or	<input type="text"/>	< None >
Forward No Answer External	<input type="checkbox"/> or	<input type="text"/>	< None >
Forward No Coverage Internal	<input type="checkbox"/> or	<input type="text"/>	< None >
Forward No Coverage External	<input type="checkbox"/> or	<input type="text"/>	< None >
Forward on CTI Failure	<input type="checkbox"/> or	<input type="text"/>	< None >
Forward Unregistered Internal	<input type="checkbox"/> or	<input type="text"/>	< None >
Forward Unregistered External	<input type="checkbox"/> or	<input type="text"/>	< None >
No Answer Ring Duration (seconds)		<input type="text"/>	
Call Pickup Group			< None >

Park Monitoring

	Voice Mail	Destination	Calling Search Space
Park Monitoring Forward No Retrieve Destination External	<input type="checkbox"/> or	<input type="text"/>	< None > A blank value means to call the parker's line.
Park Monitoring Forward No Retrieve Destination Internal	<input type="checkbox"/> or	<input type="text"/>	< None > A blank value means to call the parker's line.
Park Monitoring Reversion Timer		<input type="text"/>	A blank value will use value set in Park Monitoring Reversion Timer service parameter

MLPP Alternate Party Settings

Target (Destination)	<input type="text"/>
MLPP Calling Search Space	< None >
MLPP No Answer Ring Duration (seconds)	<input type="text"/>

Line Settings for All Devices

Hold Reversion Ring Duration (seconds)	<input type="text"/>	Setting the Hold Reversion Ring Duration to zero will disable the feature
Hold Reversion Notification Interval (seconds)	<input type="text"/>	Setting the Hold Reversion Notification Interval to zero will disable the feature
Party Entrance Tone*	Default	

Line 1 on Device SEP0050C29BF3BA

Display (Internal Caller ID) Display text for a line appearance is intended for displaying text such as a name instead of a directory number for internal calls. If you specify a number, the person receiving a call may not see the proper identity of the caller.

ASCII Display (Internal Caller ID)

External Phone Number Mask

Monitoring Calling Search Space

Multiple Call/Call Waiting Settings on Device SEP0050C29BF3BA

Note: The range to select the Max Number of calls is: 1-16

Maximum Number of Calls*

Busy Trigger* (Less than or equal to Max. Calls)

Forwarded Call Information Display on Device SEP0050C29BF3BA


Caller Name


Caller Number

Redirected Number

Dialed Number

Users Associated with Line

 *- indicates required item.

 **- Changes to Line or Directory Number settings require restart.

Další informace:
Dveřní & Bezpečnostní interkomy (oficiální stránky 2N)