


Synology - Jak propojit s 2N® Helios IP

Na následujících obrázcích bude vysvětleno, jak nastavit sekci "Onvif" na straně 2N® Helios IP a jak nastavit sekci "Device info" na straně Synology serveru, aby došlo k objevení patřičného 2N® Helios IP v síti.

1. Jako první krok musíte zkontrolovat nastavení v sekci Onvif, kde musíte povolit discovery mode na "Discoverable". V továrním nastavení bude vždy vytvořen uživatel admin/2n (Username/Password).

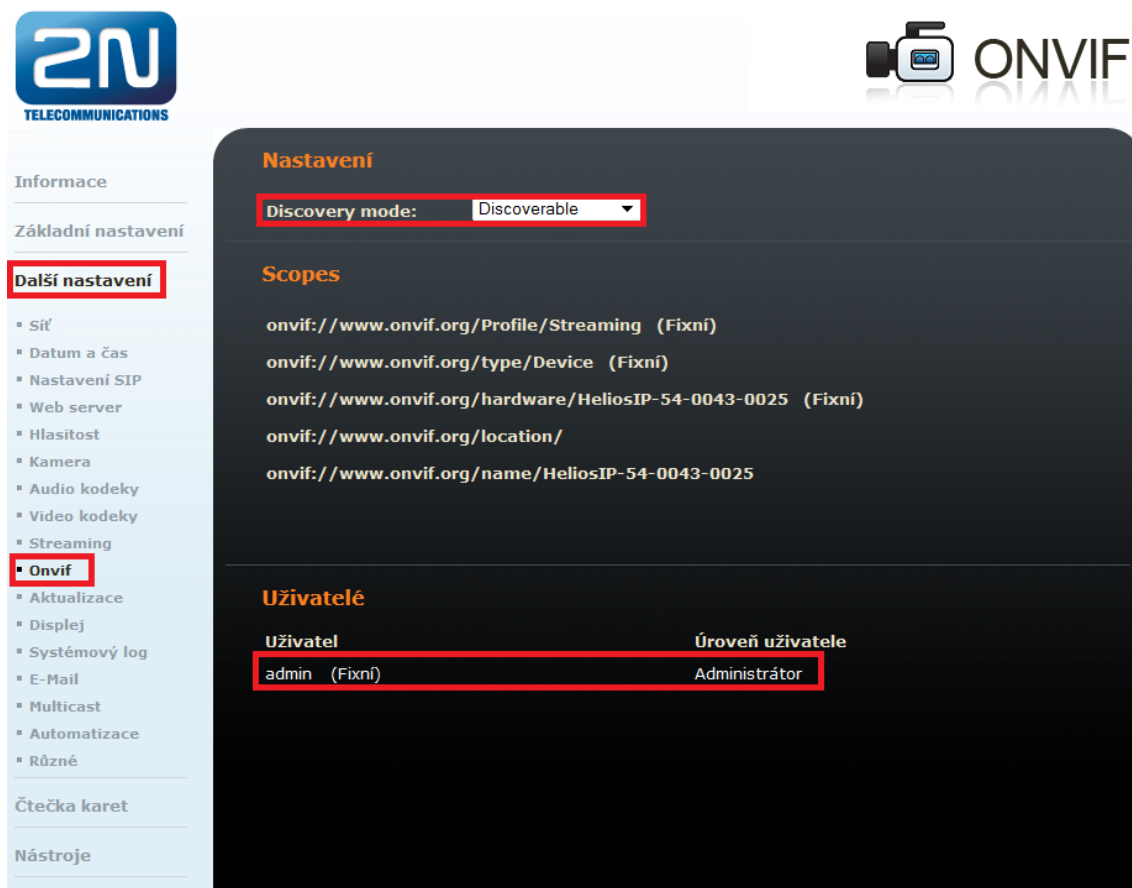


The screenshot shows the ONVIF configuration page of a 2N Helios IP camera. The interface is in Czech. On the left is a navigation menu with 'Další nastavení' (Further settings) highlighted, and 'Onvif' selected. The main content area is titled 'Nastavení' (Settings) and includes:

- Discovery mode:** A dropdown menu set to 'Discoverable'.
- Scopes:** A list of ONVIF profiles:
 - onvif://www.onvif.org/Profile/Streaming (Fixní)
 - onvif://www.onvif.org/type/Device (Fixní)
 - onvif://www.onvif.org/hardware/HeliosIP-54-0043-0025 (Fixní)
 - onvif://www.onvif.org/location/
 - onvif://www.onvif.org/name/HeliosIP-54-0043-0025
- Uživatelé (Users):** A table with two columns: 'Uživatel' (User) and 'Úroveň uživatele' (User level).

| Uživatel | Úroveň uživatele |
|---------------|------------------|
| admin (Fixní) | Administrátor |

2. Na straně Synology serveru budete moci objevit 2N® Helios IP jednotku. Poté musíte vyplnit detaily uživatele v sekci "Device Info", zadejte IP adresu manuálně, či využijte skenování LAN sítě a vyplňte Username/Password - admin/2n.

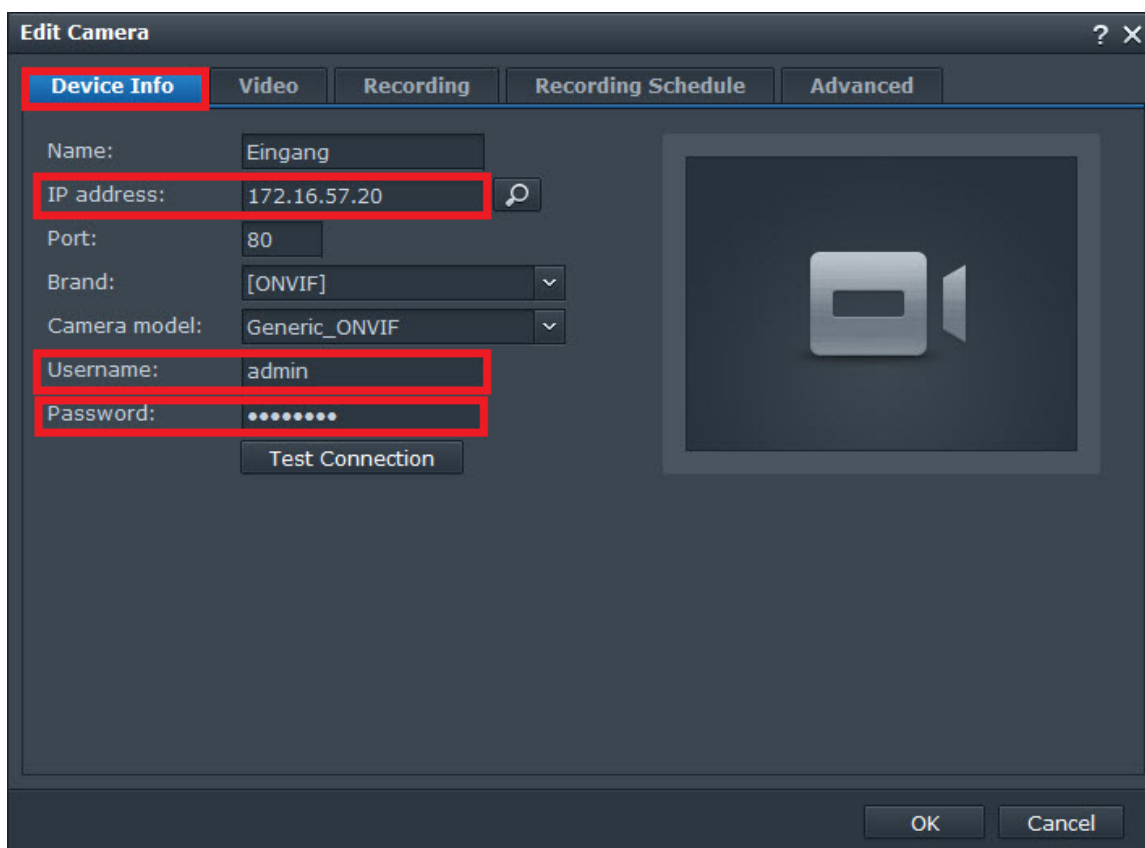

3. Na následujících třech obrázcích můžete vidět doporučené nastavení.

Edit Camera ? X

Device Info **Video** Recording Recording Schedule Advanced

Codec

Video format: H.264 ▾

Audio format: G711 ▾

Recording Image Settings

Image quality: 5 (Highest) ▾

Resolution: 640x480 ▾

Frame rate (FPS): 15 ▾

Live View Image Settings

Image quality: 5 (Highest) ▾

Resolution: 640x480 ▾

Frame rate (FPS): 15 ▾

OK Cancel

Edit Camera ? X

Device Info | Video | **Recording** | Recording Schedule | Advanced

Recording

Save video every (minutes): 30 ▾
Pre-recording time (sec.): 5 ▾
Post-recording time (sec.): 5 ▾

Recording Archives

Recording archive folder: Eingang
File name prefix: Eingang
 Keep the files within (days) 30
 Limit the archive folder up to (GB) 10
Estimate Required Space

Archive Rotation Settings

When space or time limit is reached: remove old archives ▾

OK Cancel

Edit Camera ? X

Device Info | Video | Recording | Recording Schedule | **Advanced**

Live View Source

From Surveillance Station
 From camera

Motion Detection Recording

Motion detection by the camera
 Motion detection by Surveillance Station

OK Cancel



Další informace:
Dveřní & Bezpečnostní interkomy (oficiální stránky 2N)